

No compression load on ceiling  
Possible lateral load of 8kg  
2 fixed pins in shear with ceiling

No Load Bearing on 1st Floor  
Fixings used to maintain rail guage.

2 x Bugle Screw Guide Fixing


Optional Non-penetrating  
Fixings To Ground Floor


Compression Load  
330kg / 3250 N

**Technical Information:**


The Trio / Trio Thru Car

-  **DRIVE SYSTEM:**  
Roped Drum, Braked Gear Motor Drive
-  **CAPACITY:**  
MAX Capacity 220kg / 2-3 Persons
-  **TRAVEL:**  
Up to 4000mm
-  **NO of FLOORS:**  
2 Maximum
-  **SUPPLY VOLTAGE:**  
240v 1PH 50HZ
-  **RUNNING CURRENT:**  
3.2 AMP
-  **STARTING CURRENT:**  
4.0 AMP
-  **STANDARD COLOUR:**  
Off White / Cream (RAL 9003)  
(Other colours available)


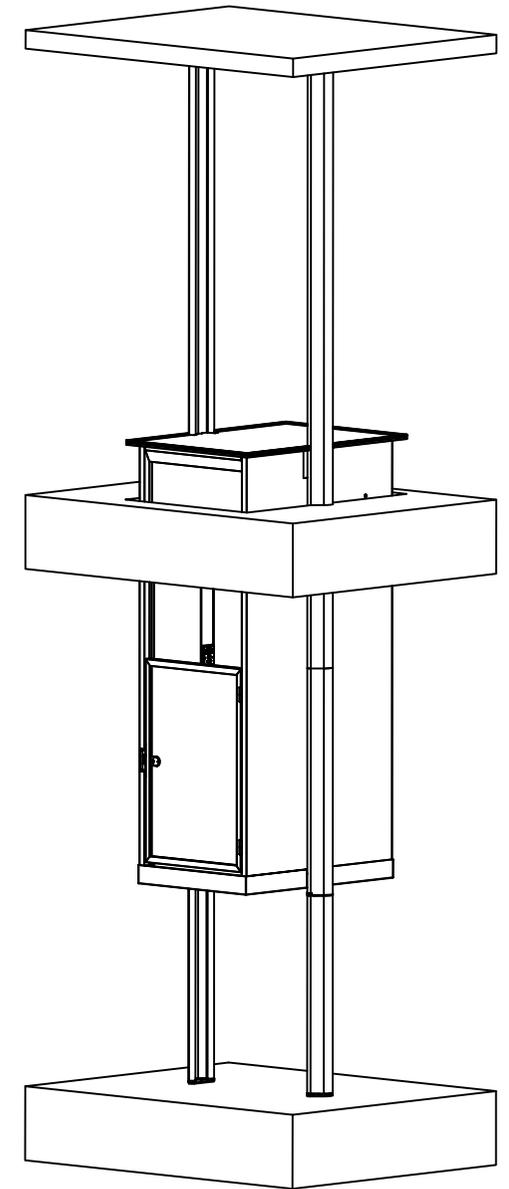


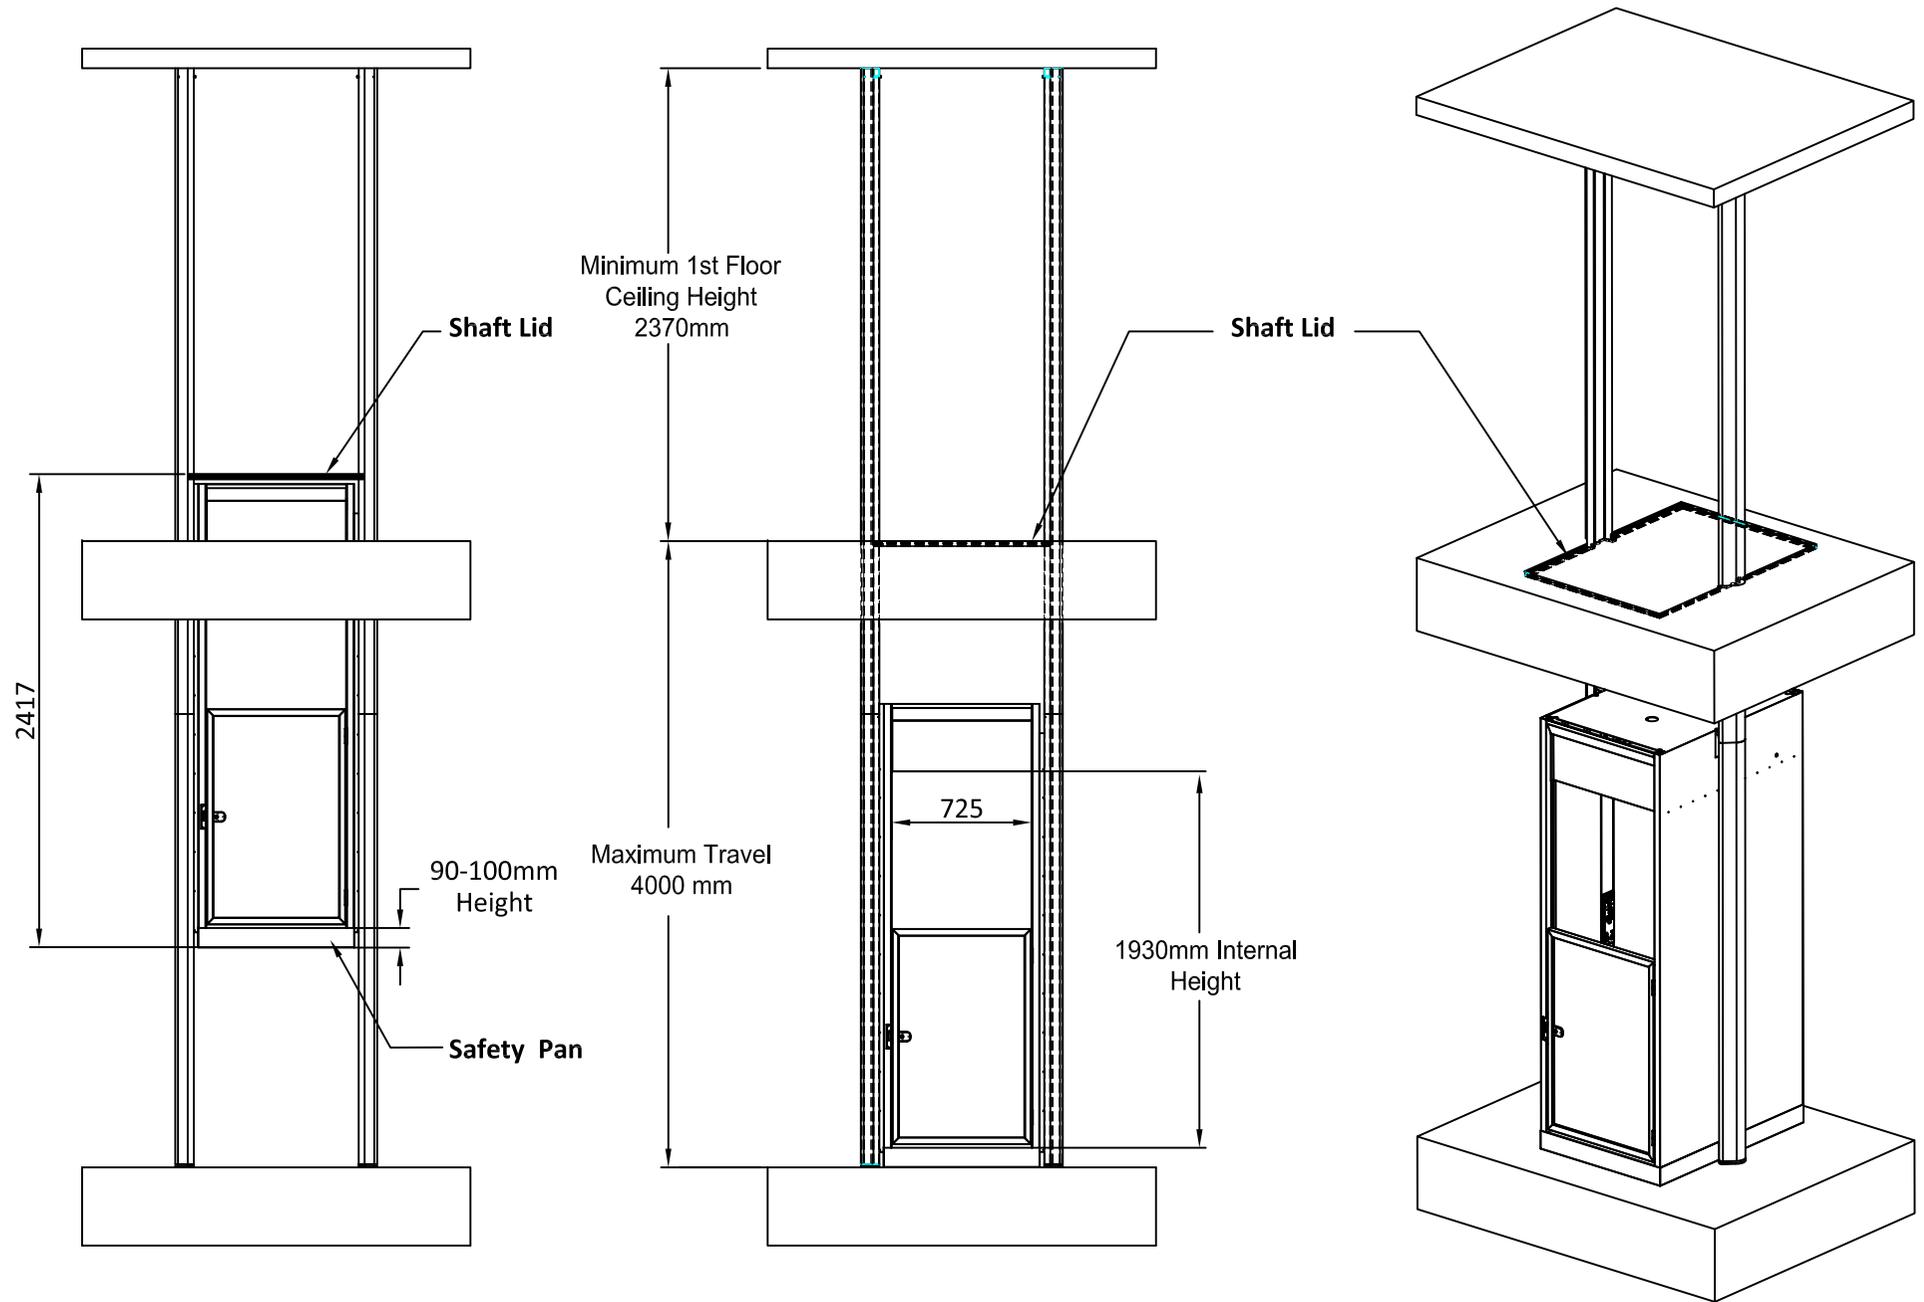

PRINT MAY BE REDUCED - DO NOT SCALE.

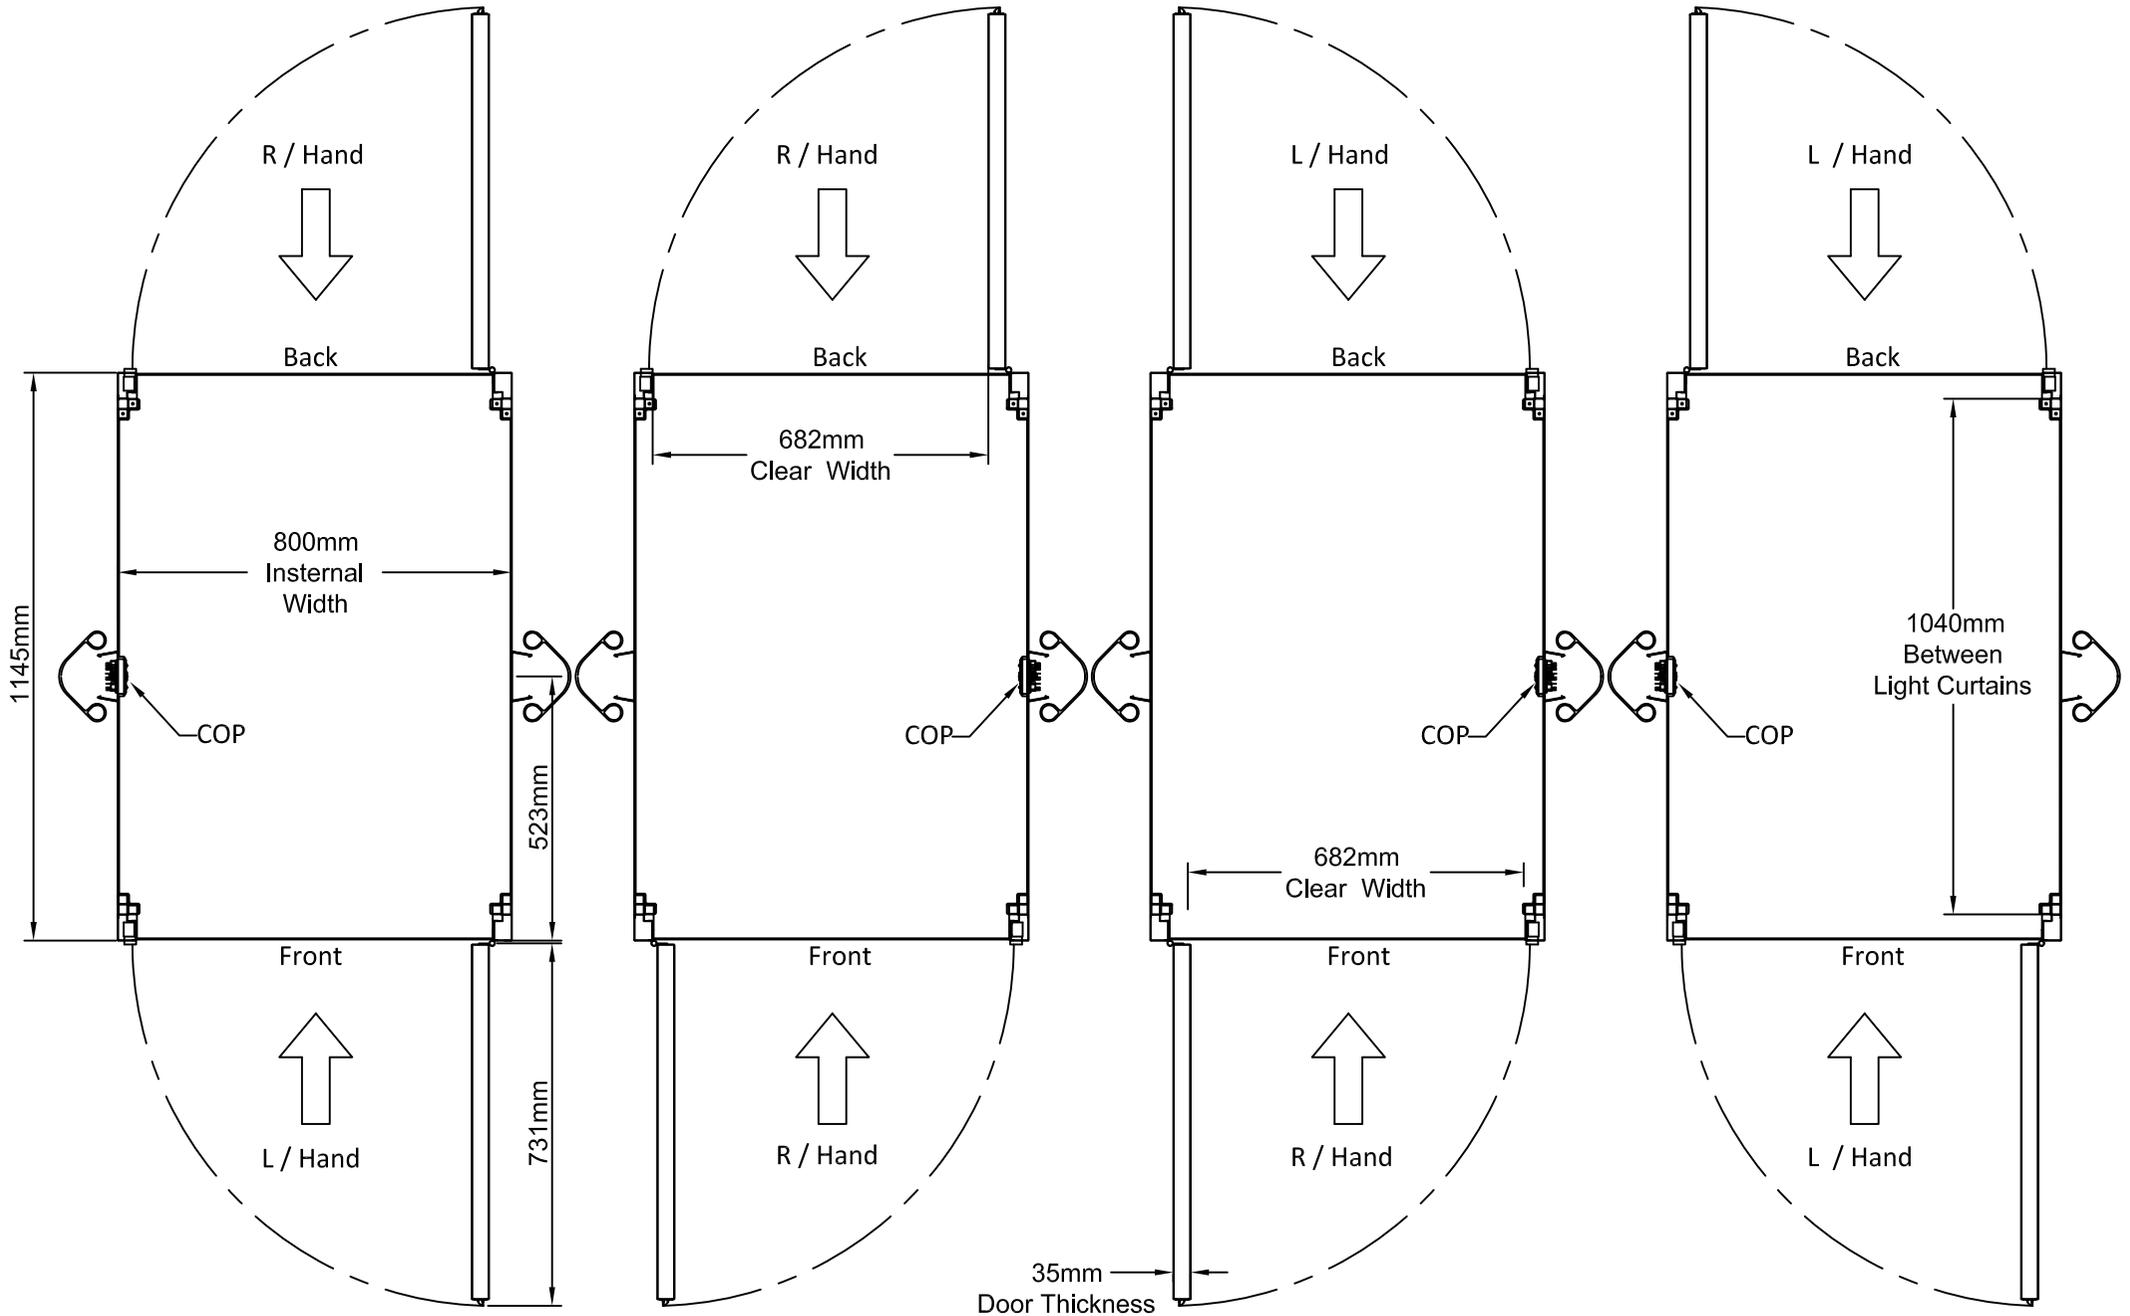

©	Stiltz Ltd.	2013	TITLE	Trio Thru Car Configuration	
Drawn	W Wang	Date	2015/5/29		
			<small>DIMENSIONS IN MM UNLESS OTHERWISE NOTED</small>	A4	Dwg No
THIRD ANGLE PROJECTION - AS 1100			SCALE:		

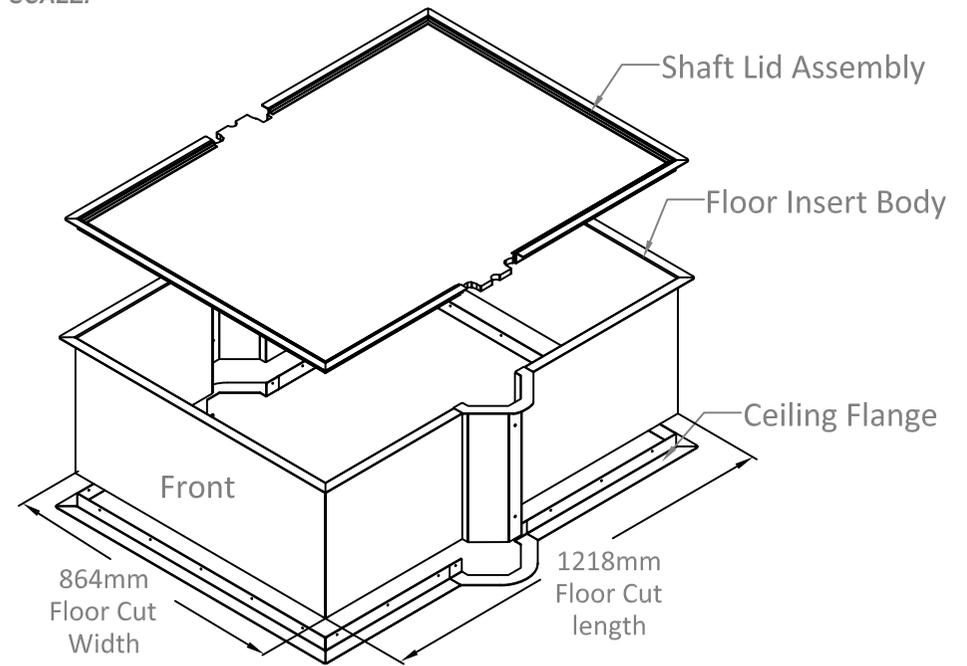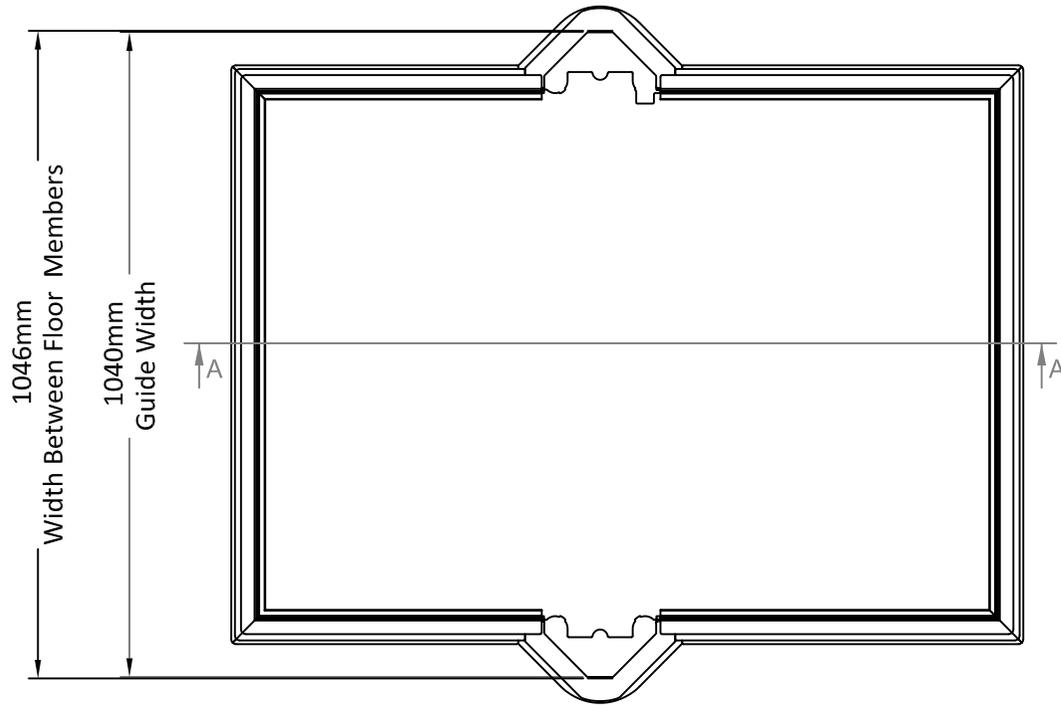

Exploded View

